


2022

DONNÉES TECHNIQUES


3CEP

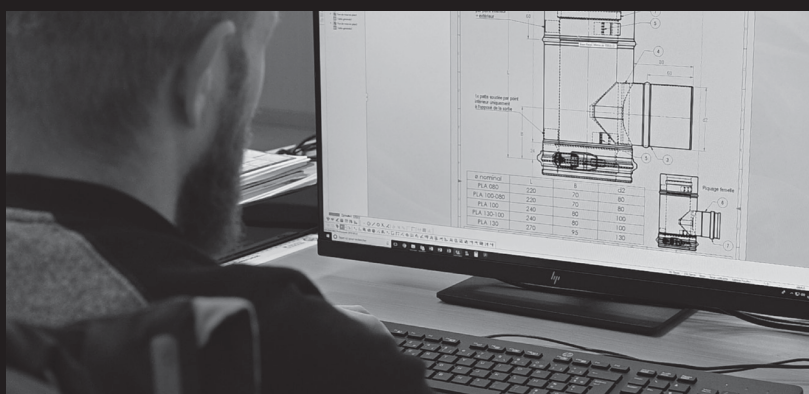

SOMMAIRE


	ÉLÉMENTS DROITS	Page 3
	COUDES	Page 4
	TÉS	Page 4
	FINITIONS HAUTES	Page 5
	TAMPON	Page 6
	SORTIES DE TOIT	Page 6
	DÉVOIEMENT	Page 7

ÉLÉMENTS DROITS :

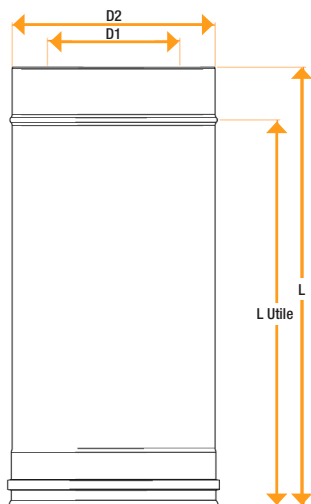

Dimensions en millimètres						
Ø nom.	80	100	130	150	180	200
Élément droit						
D1	80	100	130	150	180	200
D2	125	153	200	230	250	300


L	1000	500	330	250
L utile	940	440	270	190

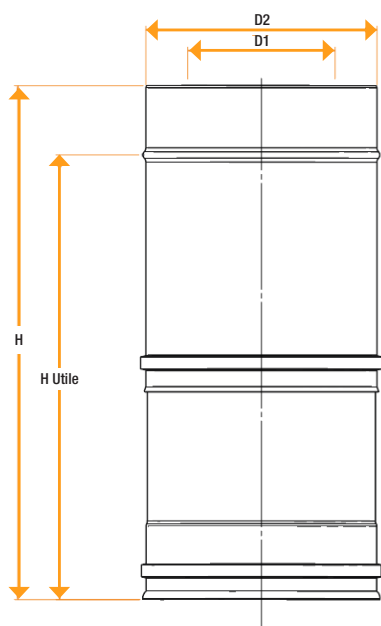

Dimensions en millimètres						
Ø nom.	80	100	130	150	180	200
Élément réglable court						
d	80	100	130	150	180	200
D	125	153	200	230	250	300
H	300 à 500					
H.utile	240 à 440					

Dimensions en millimètres						
Ø nom.	80	100	130	150	180	200
Élément réglable long						
d	80	100	130	150	180	200
D	125	153	200	230	250	300
H	600 à 900					
H.utile	540 à 940					


COUDES :

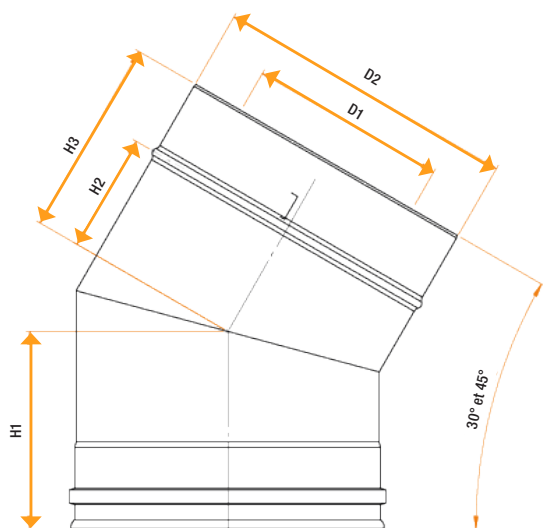


Dimensions en millimètres						
Ø nom.	80	100	130	150	180	200
Coude 30°						
D1	80	100	130	150	180	200
D2	125	153	200	230	250	300
H1	115	125	135	145	150	155
H2	55	65	75	90	95	100
H3	115	125	135	145	150	155

Dimensions en millimètres						
Ø nom.	80	100	130	150	180	200
Coude 45°						
D1	80	100	130	150	180	200
D2	125	153	200	230	250	300
H1	125	130	145	260	160	165
H2	65	70	85	95	105	110
H3	125	130	145	145	150	155


TÉS :

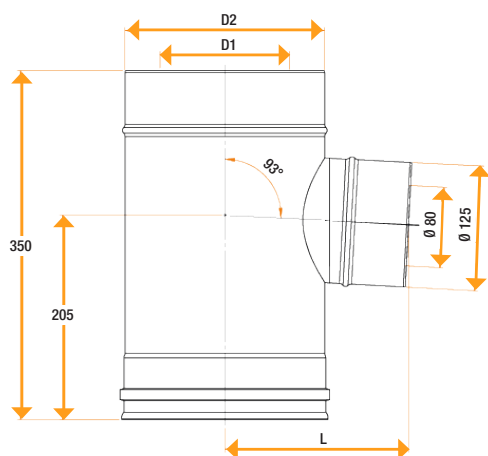

Dimensions en millimètres						
Ø nom.	80	100	130	150	180	200
Té 93°						
D1	80	100	130	150	180	200
D2	125	153	200	230	250	300
L	147	161	184	199	209	234

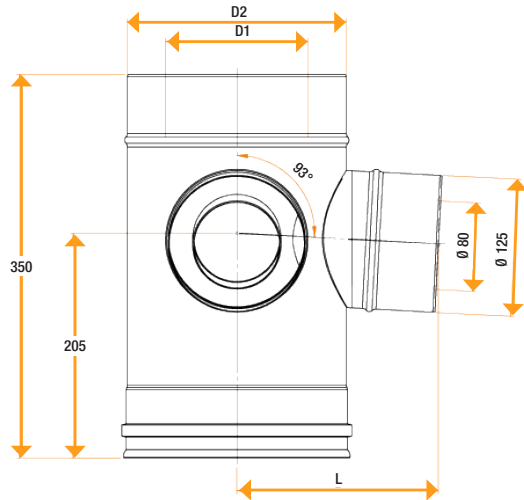


Dimensions en millimètres				
Ø nom.	130	150	180	200
Té 93° double 90°				
D1	130	150	180	200
D2	200	230	250	300
L	184	199	209	234

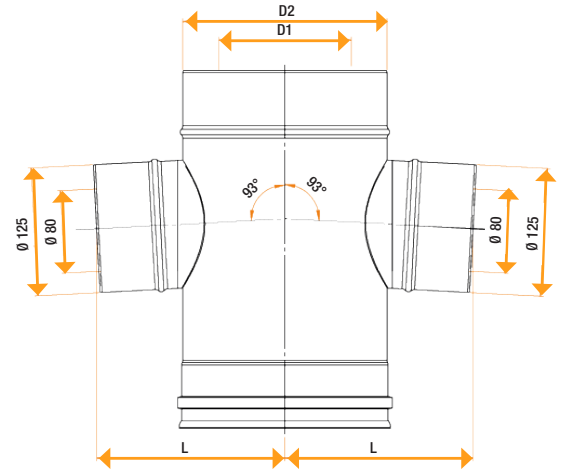


Dimensions en millimètres				
Ø nom.	130	150	180	200
Té 93° double 180°				
D1	130	150	180	200
D2	200	230	250	300
L	184	199	209	234

FINITIONS HAUTES :

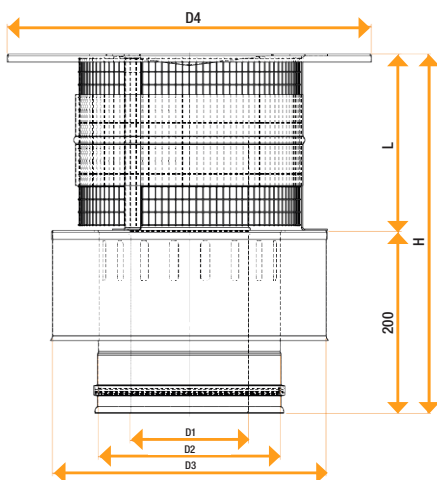


Dimensions en millimètres						
Ø nom.	80	100	130	150	180	200
Chapeau anti-refouleur						
D1	80	100	130	150	180	200
D2	125	153	200	230	250	300
D3	204	231	301	330	350	400
D4	306	360	400	460	500	600
H	344	364	394	414	444	464
L	144	164	194	214	244	264

TAMPON :

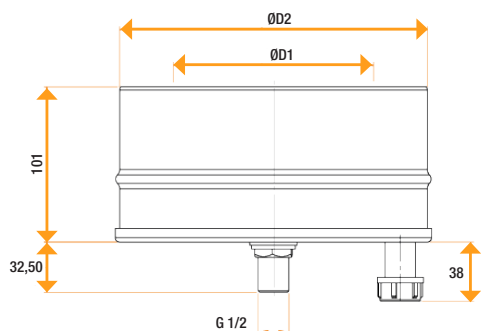


Dimensions en millimètres						
Ø nom.	80	100	130	150	180	200
Tampon double purge						
D1	80	100	130	150	180	200
D2	125	153	200	230	250	300

SORTIES DE TOIT :

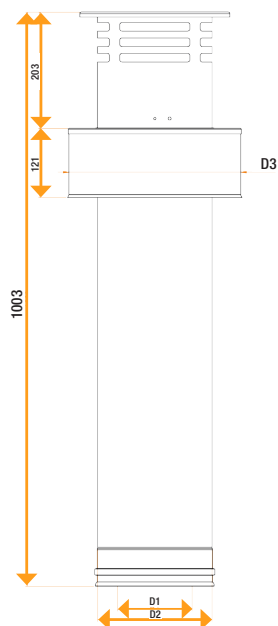


Dimensions en millimètres						
Ø nom.	80	100	130	150	180	200
Terminal vertical						
D1	80	100	130	150	180	200
D2	125	153	200	230	250	300
D3	204	231	301	311	361	401

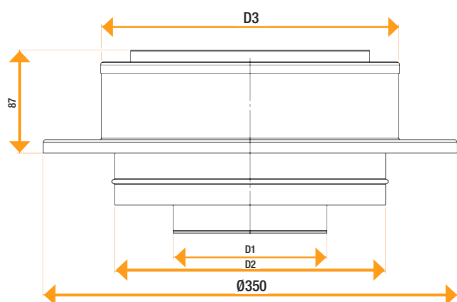

Dimensions en millimètres						
Ø nom.	80	100	130	150	180	200
Raccord Polytoit						
D1	80	100	130	150	180	200
D2	230			310		
D3	250			330		

DÉVOIEMENT :

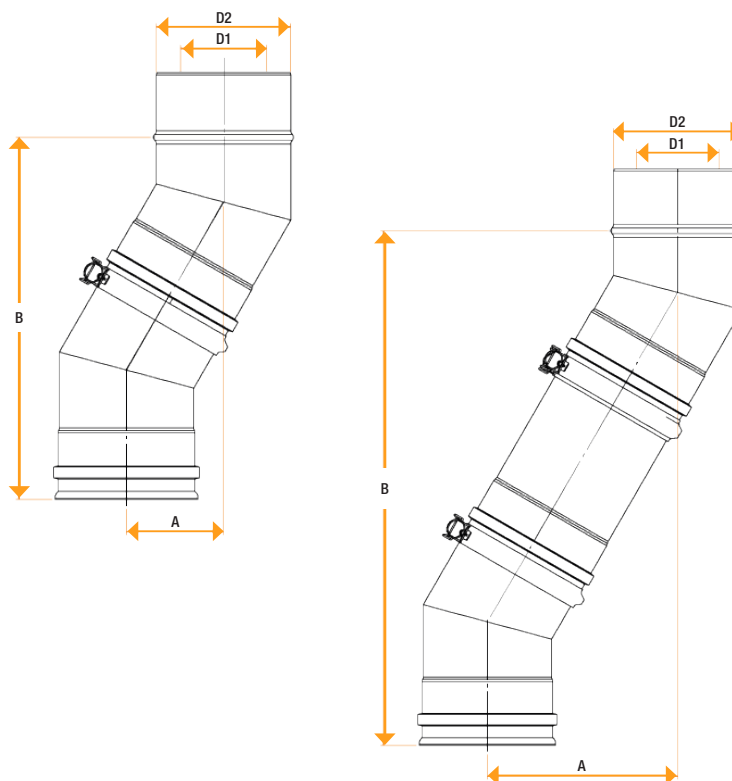

		Dévoisement à 30°						Dévoisement à 45°						
		d (mm)	80	100	130	150	180	200	80	100	130	150	180	200
		D (mm)	125	153	200	230	250	300	125	153	200	230	250	300
2 coudes	A	90	100	110	120	125	130		142	149	170	177	192	199
	B	336,5	374	411	448,5	467	486		343	360	411	429	462	479
2 coudes + L.250	A	185	195	205	215	220	225		276	283	305	312	326	333
	B	501	538	576	613	632	650		477	494	545,5	562,5	597	614
2 coudes + L.330	A	225	235	245	255	260	265		333	340	361	368	382	389
	B	570	608	645	682	701	720		534	551	602	619	653	670
2 coudes + L.500	A	310	320	330	340	345	350		453	460	481	488	503	510
	B	718	755	792	830	848	867		654	671	722	739	773,5	790,5
2 coudes + L.1000	A	560	570	580	590	595	600		807	814	835	842	856	863
	B	1151	1188	1225	1263	1281	1300		1007,5	1025	1076	1093	1127	1144